

TAMKO® TWP-1 Quick Dry Waterproofing Primer

PRODUCT DATA

DESCRIPTION

TAMKO® TWP-1 is a high quality, rubberized, primer, formulated for the professional waterproofing contractor.

USES

This quick dry, high-tack primer provides excellent bond to asphalt, concrete, masonry, DensGlass® and DensGlass® Gold sheathing, OSB, plywood, and metal surfaces.

LIMITATIONS

TWP-1 must not be used on or come into contact with EPS / XPS or ICF surfaces.

APPLICATION


Apply with a long nap roller or spray equipment at the rate of 250 to 300 square feet per gallon. Allow to cure until the surface is tacky, but will not transfer when touched. Primer should be allowed to dry a minimum of 1 hour, and a maximum of 8 hours. Do not thin with organic solvents.

TYPICAL PHYSICAL PROPERTIES*

Property	Typical Value
Weight per Gallon	7.63 lbs
Solids Content	38% by weight
Tack Free Time	30 min. @ 75°F
VOC	Less than 450 grams/litre**
Flash Point	<68°F
Packaging	5 gallon pails

*All values stated as nominal at time of manufacture.

**This primer does not meet the VOC requirements in the following states: California, Delaware, Maryland, New Jersey, New York, Pennsylvania, Virginia, Maine and the District of Columbia.

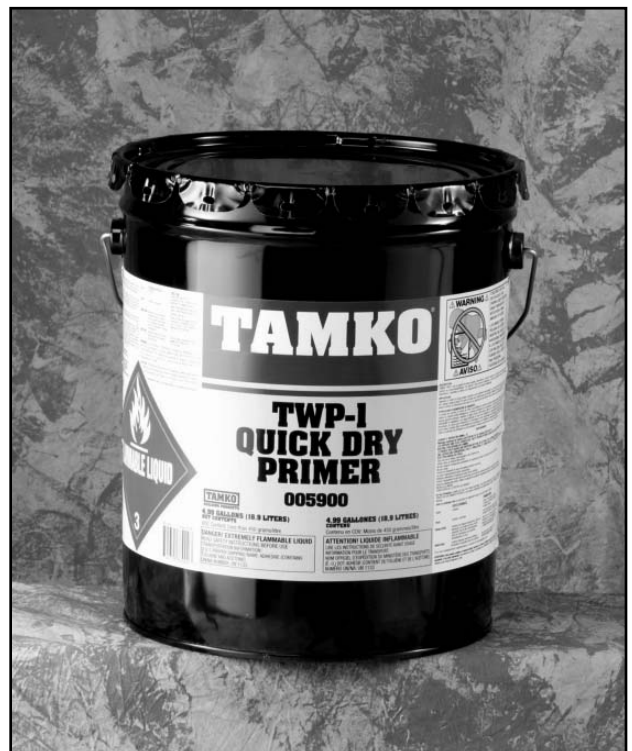

For safety, health, and handling information contact TAMKO at 800-641-4691 ext. 51 for Material Safety Data Sheets (MSDS).

WARNINGS AND HAZARDS

TWP-1 contains combustible solvents. Avoid exposure to sparks, open flame, heat, and other forms of ignition. Use in well ventilated areas. Avoid breathing vapors. Refer to MSDS for detailed product information and warnings.

CAUTION: The National Institute for Occupational Safety and Health (NIOSH) has concluded that fumes of heated asphalt are a potential occupational carcinogen. Do not heat or burn this product.

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.

This product is covered by a 5-year limited warranty. For information regarding or a copy of TAMKO's limited warranty, contact your local TAMKO representative, visit us online at tamko.com, or call us at 800-641-4691.

©2009 TAMKO Building Products, Inc. TAMKO® is a registered trademark of TAMKO Building Products, Inc.

tamko.com

Corporate	220 West 4th Street, Joplin, Missouri 64801	800-641-4691
Central District	220 West 4th Street, Joplin, Missouri 64801	800-641-4691
Northeast District	4500 Tamko Drive, Frederick, Maryland 21701	800-368-2055
Southeast District	2300 35th Street, Tuscaloosa, Alabama 35401	800-228-2656
Southwest District	7910 South Central Expressway, Dallas, Texas 75216	800-443-1834
Western District	5300 East 43rd Avenue, Denver, Colorado 80216	800-530-8868

