



STORMFIGHTER FLEX™

POLYMER MODIFIED SHINGLES



Featuring TAMKO's all-new proprietary polymer technology ForceFX™

Introducing the all-weather performance shingle with the FLEXibility to help withstand impact, high winds, rain, and freezing temperatures.

UP TO 35% INCREASED TEAR RESISTANCE*

SUPERIOR HANDLING AND SEALING IN COLD WEATHER

ENHANCED GRANULE ADHESION

160 MPH WIND WARRANTY†

* When compared to industry standard ASTM D3462 based on testing conducted Jan-Sept 2023.

Highest wind warranty IR shingle



HIGHEST IR WIND WARRANTY



REINFORCED NAIL ZONE



ADVANCED SEALANTS

† See StormFighter FLEX's full High Wind Application Instructions for all requirements and restrictions.

INSTALL DOWN TO 25° F

Install in freezing temperatures



APPLICATION WARRANTED DOWN TO 25° F



HIGHLY FLEXIBLE



ENHANCED WEATHER RESILIENCE

IMPACT RATED‡



STORMFIGHTER FLEX™ 4
CLASS 4 POLYMER MODIFIED SHINGLES



STORMFIGHTER FLEX™ 3
CLASS 3 POLYMER MODIFIED SHINGLES



‡ Stormfighter FLEX™ 3 and 4 shingles are classified by UL for compliance with UL 2218 Class 3 or Class 4 impact resistance.

CONTRACTORS WHO TRIED STORMFIGHTER FLEX™ SAID:

“It’s going to be a... game-changer for the industry.”

“It’s a 10 — we’ll sell the heck out of it.”

“I don’t think anyone has anything close to it.”



See why contractors are choosing StormFighter FLEX™ at tamko.com/flex

TAMKO Certified Contractors may be eligible for certain benefits, which could include (a) the ability to offer Enhanced Limited Warranties, (b) rebates or other consideration in connection with TAMKO® products; and (c) access to offers through The TAMKO Edge® Program, including apparel, marketing materials, and access to third-party products, services and discounts.

TAMKO

OTHER

	STORMFIGHTER FLEX ⁴	STORMFIGHTER FLEX ³	POLYMER MODIFIED SHINGLES
UL TESTED IMPACT RATING	Class 4	Class 3	Class 3 or 4
HIGH WIND WARRANTY MPH	160 MPH	160 MPH	130 MPH
LOWEST INSTALL TEMPERATURE PER MANUFACTURER	25° F	25° F	45° F
SUPERIOR FLEXIBILITY	✓	✓	—
REINFORCED NAILING ZONE	✓	✓	—
ADVANCED SHINGLE SEALANT	✓	✓	—





1-800-641-4691
tamko.com

PROLINE™



INDUSTRY LEADING WARRANTY, PERFORMANCE, & TECHNOLOGY

STORMFIGHTER FLEX™ PREMIUM COLOR OPTIONS

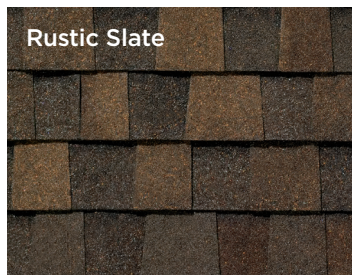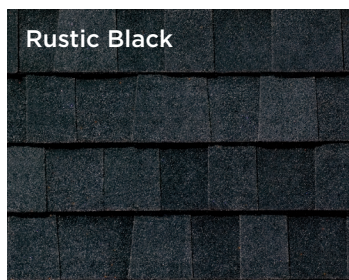

Prior to making your final color selection, TAMKO recommends viewing an actual roof installation. See tamko.com/colorselection for complete details.

StormFighter FLEX™ shingles meet the following classifications

UL Listed for:
Class A Fire Resistance

UL Classified:
Wind Resistance
Impact Resistance
ASTM D3462 and ICC-ES
Acceptance Criteria AC438

Tested in Compliance with:
UL 790/ASTM E 108, Class A
ASTM D3161, Class F
ASTM D7158, Class H
UL 2218 Class 3' Impact Resistance
UL 2218 Class 4' Impact Resistance
ASTM D3462
ICC-ES Acceptance Criteria AC438

Olde English Pewter is listed by the Cool Roof Rating Council® (CRRC)

UL Evaluation Reports:
UL Evaluation Report ER2919-01
UL Evaluation Report ER2919-02

**Florida Building Code
Product Approval**
FL 18355
FL 35321

**Miami-Dade County
Product Control Approved**



tamko.com/expertschoice

*Stormfighter FLEX™ 3 and 4 shingles are classified by UL for compliance with UL 2218 Class 3 or Class 4 impact resistance.



TAMKO provides a limited warranty for many products, that includes a binding arbitration clause. See tamko.com/limitedwarranties for complete details.

PHILLIPSBURG 41001783 0324
©2024 TAMKO Building Products LLC

