


TITAN XT[®]

PREMIUM ARCHITECTURAL SHINGLES



The most INNOVATIVE SHINGLE on the market is now CLASS 3 IMPACT RATED* FEATURING an INDUSTRY-FIRST HIGH WIND WARRANTY with coverage up to 160 MPH*

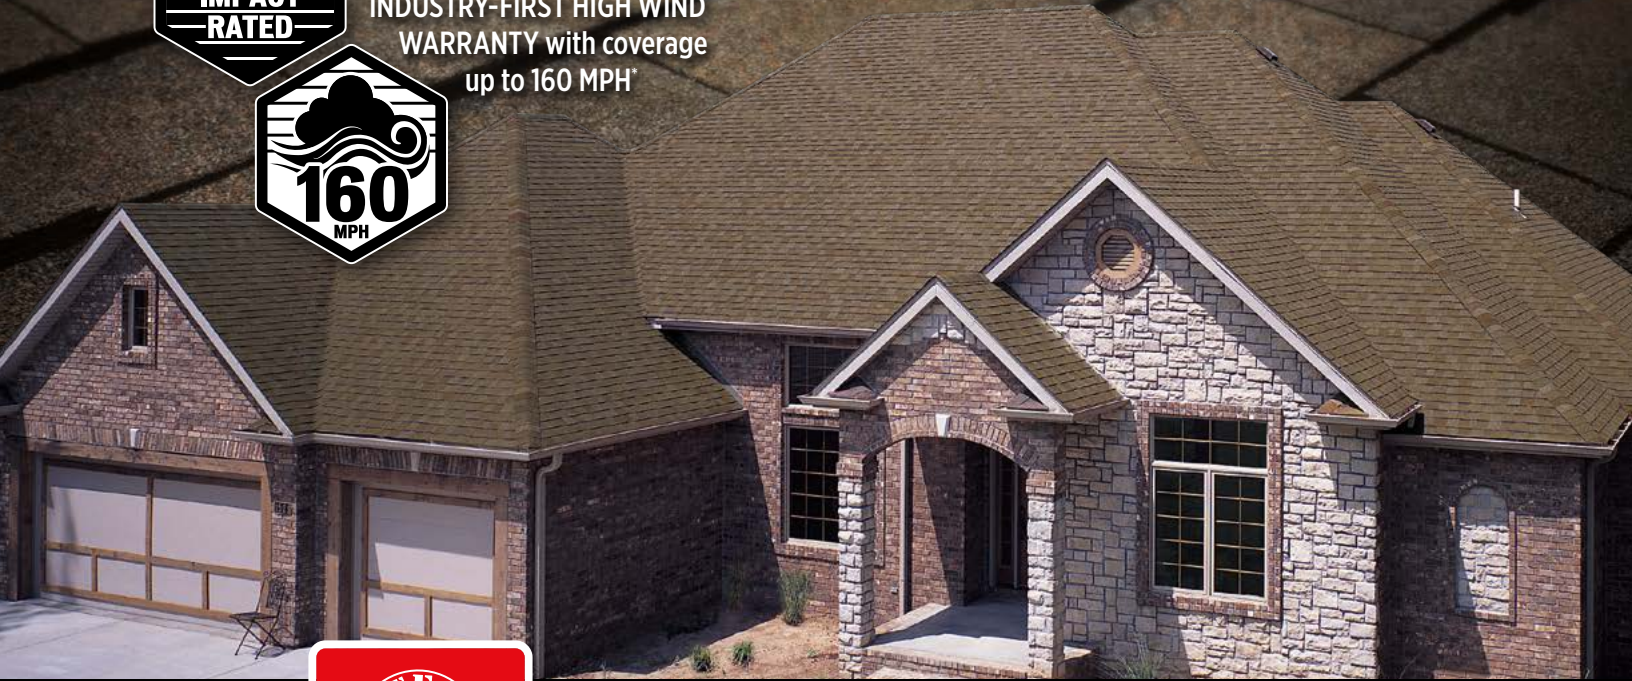

Voted 2024 Product of the Year


in the Home Protection Category.
Survey of 40,000 consumers by Kantar

tamko.com/poy

WHERE INNOVATION MEETS EXTREME TECHNOLOGY[®]

WINDGUARD[™] WARRANTY

Introducing an industry first — a high wind warranty with coverage up to 160 MPH, with only four nails installed in the expanded nailing zone, when using TAMKO[®] Starter.* Inspired by the combined performance of our AnchorLock[™] layer and Advanced Fusion[™] sealants to help the shingle hold fast.

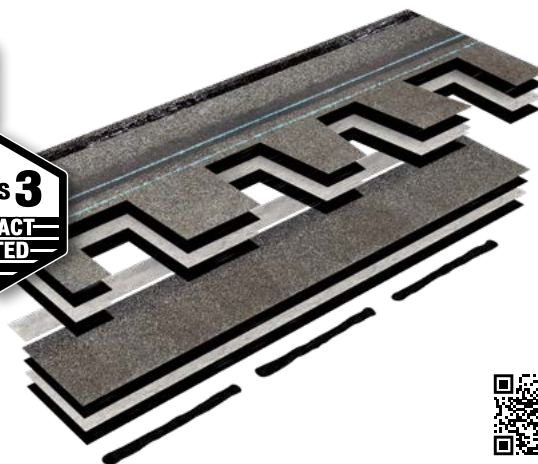

TITAN XT PREMIUM ARCHITECTURAL SHINGLES FEATURE:

- ADVANCED FUSION[™] SEALANTS
- APEX COLOR[®] TECHNOLOGY
- PROTECTIVE GRANULES
- ULTRAMAX WEATHERING[™] LAYER
- POWER CORE[®]
- ANCHORLOCK[™] LAYER
- RAPID FIRE ZONE[®] NAIL ZONE



Find out more about Titan XT innovative technologies.

TITAN XT[®]



1-800-641-4691
tamko.com

WHERE INNOVATION MEETS EXTREME TECHNOLOGY[®]

Titan XT[®] shingles feature some of the most advanced innovative technology in the industry. With powerful engineering, Titan XT shingles are designed to offer an advantage for both homeowners and contractors, combining in-demand product features into one **Extreme Technology** shingle designed to help weather extreme conditions.

PROLINE[™]

TITAN XT[®] PREMIUM COLOR OPTIONS



Prior to making your final color selection, TAMKO recommends viewing an actual roof installation. See tamko.com/colorselection for complete details.

Certain colors and products may not be available in your area. Information included in this item was current at the time of printing. To obtain a copy of the most current version of this item, visit us online at tamko.com or call us at 1-800-641-4691.

Titan XT[®] shingles meet the following classifications

UL Listed for:
Class A Fire Resistance

UL Classified:
Wind Resistance
Impact Resistance
ASTM D3462 and ICC-ES
Acceptance Criteria AC438

Tested in Compliance with:
UL 790/ASTM E 108, Class A
ASTM D3161, Class F
ASTM D7158, Class H
UL 2218 Class 3 Impact Resistance[†]
ASTM D3462
ICC-ES Acceptance Criteria AC438

UL Evaluation Reports:
UL Evaluation Report
ER2919-01
UL Evaluation Report
ER2919-02

**Florida Building Code
Product Approval**
FL 18355
FL 35321
**Miami-Dade County
Product Control Approved**

Desert Sand and Olde English Pewter are listed by the Cool Roof Rating Council[®] (CRRC).

[†]Titan XT[®] shingles are classified by UL for compliance with UL 2218 Class 3 impact resistance.



TAMKO provides a limited warranty for many products, that includes a binding arbitration clause. See tamko.com/limitedwarranties for complete details.

FREDERICK 41001607 0424
©2024 TAMKO Building Products LLC