

TAM-PRO® 842 FIRE RATED (FR) FIBERED ALUMINUM ROOF COATING


PRODUCT DATA

DESCRIPTION

An excellent flame-retardant protective coating formulated for the professional roofing contractor. Combining high quality select asphalts and petroleum solvents with tough fibers and premium aluminum pigments, the coating forms a bright, highly reflective surface upon application. **100% ASBESTOS FREE!**

USES

This high performance material is ideal for coating asphalt built-up roofing, modified bitumen membranes, flashings, other bitumen based materials. TAM-PRO Fire Rated (FR) Fibered Aluminum Roof Coating has been tested by Underwriters Laboratories Inc. in accordance with Test Standards UL 790, "Test for Fire Resistance of Roof Covering Materials", and has achieved a UL Class A Flame Spread rating over UL listed fiberglass built-up roof systems and many modified bitumen membranes. Non-combustible decks only. Not all possible systems are U.L. rated. Consult TAMKO or Underwriters Laboratories for listings.

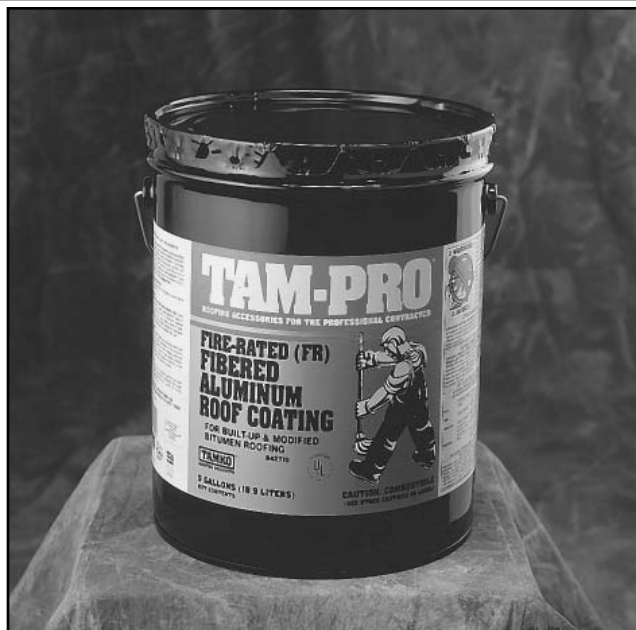

APPLICATION

Apply with a brush or airless spray apparatus at a rate of 1.5 to 2 gallons per 100 square feet. Outside temperature must be 50 F and rising before applying.

NOTE: STIR THOROUGHLY BEFORE AND DURING USE TO PREVENT STREAKING AND BROWN SPOTS

PRODUCT NUMBER

30001316 – 5 GAL – Green Cove Springs FL
30001664 – 5 GAL – Columbus KS

APPLICABLE STANDARDS

ASTM D 2824 Type III Standard Specification for Aluminum Pigmented Asphalt Roof Coating, U.L. Classified, FM Approved, Miami-Dade County Product Control Approved
NOA 08-0423.16 Expiration Date 07/24/13

CAUTION: The National Institute for Occupational Safety and Health (NIOSH) has concluded that fumes of heated asphalt are a potential occupational carcinogen. Do not heat or burn this product.

TYPICAL PHYSICAL PROPERTIES*

| | MIN | MAX | METHOD |
|--|-----|-----|--------|
| Total solids (non-volatile), % | 42 | -- | D 2824 |
| Flash Point, F | 100 | -- | D 93 |
| VOC, grams/litre | -- | 500 | |
| Viscosity, Stormer/300 grams @ 77 F, seconds | 15 | 40 | D 562 |
| Reflectance, % | 50 | -- | D 2824 |

*All values stated as nominal

For Technical Services call 800-641-4691.

| | | |
|--------------------|--|--------------|
| Central District | 220 West 4th Street, Joplin, Missouri 64801 | 800-641-4691 |
| Northeast District | 4500 Tamko Drive, Frederick, Maryland 21701 | 800-368-2055 |
| Southeast District | 2300 35th Street, Tuscaloosa, Alabama 35401 | 800-228-2656 |
| Southwest District | 7910 South Central Expressway, Dallas, Texas 75216 | 800-443-1834 |
| Western District | 5300 East 43rd Avenue, Denver, Colorado 80216 | 800-530-8868 |

TAMKO® and TAM-PRO® are registered trademarks of TAMKO Building Products, Inc.

©2008 TAMKO Building Products, Inc.

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.

tamko.com

