

TAMKO® NO. 30 ASTM D 4869

ASPHALT SATURATED ORGANIC FELT

PRODUCT DATA

MANUFACTURED IN FREDERICK, MD

TAMKO® NO. 30 ASTM D 4869 ASPHALT SATURATED ORGANIC FELT features a tough TAMKO organic felt (non-perforated) that is saturated with asphalt.



USES


Accepted for use as an underlayment felt to be applied over the deck prior to the installation of TAMKO asphalt shingles.

CERTIFICATIONS/REPORTS

ASTM D 4869, Type 1
U.L. Prepared Roofing Accessory

PRODUCT DATA*

Roll Dimensions	72' x 36"
Coverage per roll	2 Squares
Laying Lines	2", 4", 17"
Rolls per pallet	42

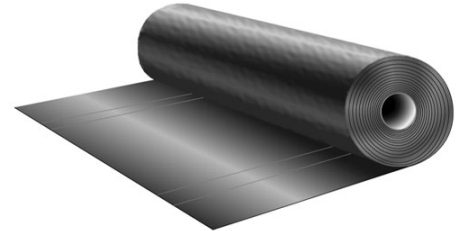

*All values stated as nominal

THIS PRODUCT IS SOLD "AS IS" WITHOUT WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

CAUTION: This product contains oxidized asphalt. Occupational exposures to oxidized asphalt and its emissions during roofing have been classified by International Agency for Research on Cancer (IARC) as a "probable human carcinogen." Oxidized asphalt also contains Polycyclic Aromatic Hydrocarbons some of which have been classified by IARC as known or probable human carcinogens. The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing and contact with skin.



TAMKO Logo, Roofer Logo, and TAMKO® are registered trademarks of TAMKO® Building Products, Inc.

Central District	220 West 4th St.	Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr.	Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St.	Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp.	Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave.	Denver, CO	80216	800-530-8868

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.