


# TAMKO® NON-FIBERED ROOF & FOUNDATION COATING PRODUCT DATA

A pure asphalt liquid precisely blended to a smooth heavy paint consistency. It is compounded with special penetration oils for deep penetration. Inert to mild acids and alkali.

## 100% ASBESTOS FREE - GUARANTEED

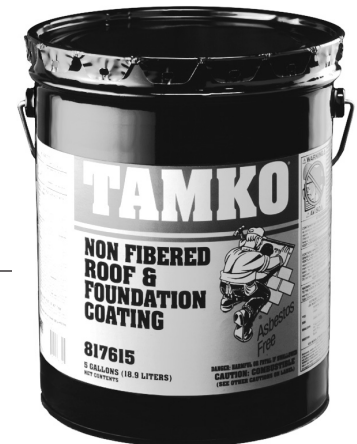

PRODUCT NUMBER  
 30001273 - 1 GAL - Green Cove Springs FL  
 30001641 - 1 GAL - Columbus KS  
 30001274 - 5 GAL - Green Cove Springs FL  
 30001642 - 5 GAL - Columbus KS

### USES

Provides a variety of benefits where a thin protective coat is required. Prolongs the life of composition roofing by sealing small holes and cracks. Also used as an economical coating on most metal roofs and surfaces including fence posts and underground pipes. Wooden fences posts and masonry surfaces may also be treated with this material to provide additional moisture protection.

### APPLICATION

Apply with a roofer's brush or spray equipment. Can be applied at temperatures as low as 50°F when kept at room temperature prior to use. Foundations - A two coat application is recommended allowing the first coat to dry 24 hours. Apply material from footing to grade level, working and coating all crevices and pores. Uniformity is important. Do not leave thin or bare spots. Application rates include:

Composition Roofing	1 gallon per 100 sq. ft.
Foundation Coating	1 gallon per 75 - 100 sq. ft. per coat
	Two coat application

### PRODUCT DATA\*

TYPICAL PHYSICAL PROPERTIES*	MIN	MAX
Total solids (non-volatile),%	65	75
Volatiles, %	25	35
Flash point, °F	100	- -
VOC, grams/litre	- -	300
Viscosity, Stormer/100 rev. @77°F, seconds	20	40

\*All values stated as nominal

For Technical Services call 1-800-641-4691

Visit our Web Site at [tamko.com](http://tamko.com)



TAMKO Logo, Roofer Logo and TAMKO® are registered trademarks of TAMKO® Building Products, Inc.

CAUTION: The National Institute for Occupational Safety and Health has concluded that the fumes of heated roofing asphalt are a potential occupational carcinogen. The physical nature of this product may help limit any inhalation hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. This product should not be heated or burned using a direct flame device. Take precautions to prevent breathing and contact with skin.

Central District	220 West 4th St.	Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr.	Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St.	Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp.	Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave.	Denver, CO	80216	800-530-8868

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at [tamko.com](http://tamko.com) or call us at 800-641-4691.