


TAMKO® PLASTIC ROOF CEMENT

PRODUCT DATA

A heavy bodied material formulated from select asphalts and petroleum solvents. Easy to apply, it contains special additives that enhance spreadability. Dries to form a durable, but pliable seal that allows for minor expansion and contraction. Acid and alkali resistant, it bonds to all clean surfaces except coal tar based materials.

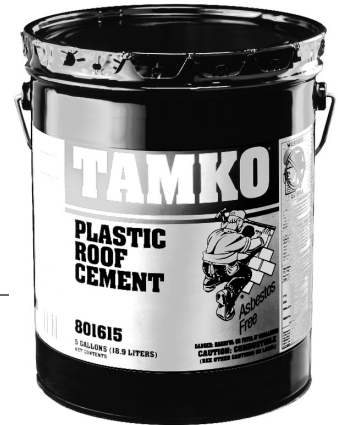

100% ASBESTOS FREE - GUARANTEED!

USES

Flashing construction and other detail roofing work such as tie-offs or shingle securement. Provides excellent waterproofing properties for temporary repairs, or more permanent repairs when used with fiberglass mesh roof fabric.

PRODUCT NUMBER
 30001215 - 1 GAL - Green Cove Springs FL
 30001610 - 1 GAL - Columbus KS
 30001216 - 5 GAL - Green Cove Springs FL
 30001611 - 5 GAL - Columbus KS

APPLICATION

Apply with a trowel or knife. One gallon covers 12.5 sq. ft. when applied at 1/8" thickness.

PRODUCT DATA*

TYPICAL PHYSICAL PROPERTIES*

| | MIN | MAX | METHOD |
|-------------------------------|-----|-----|--------|
| Total solids (non-volatile),% | 75 | 85 | D 4586 |
| Volatiles, % | 15 | 25 | D 4586 |
| Flash point, °F | 100 | - - | D 92 |
| VOC, grams/litre | - - | 300 | |
| Asphalt, % | 35 | 65 | D 4 |

SPECIFICATION COMPLIANCE:

ASTM D 4586 Type 1 Standard Specification for Asphalt Roof Cement.

*All values stated as nominal

For Technical Services call 1-800-641-4691

Visit our Web Site at tamko.com



CAUTION: This product contains crystalline silica. Crystalline silica has been classified as a "known" human carcinogen by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains cutback asphalt. IARC has classified "extracts of steam and air-refined bitumens" (cutback asphalt) as "possibly carcinogenic to humans." The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing fumes and contact with skin.

TAMKO Logo, Roofer Logo and TAMKO® are registered trademarks of TAMKO® Building Products, Inc.

| | | | | |
|--------------------|----------------------|----------------|-------|--------------|
| Central District | 220 West 4th St. | Joplin, MO | 64801 | 800-641-4691 |
| Northeast District | 4500 Tamko Dr. | Frederick, MD | 21701 | 800-368-2055 |
| Southeast District | 2300 35th St. | Tuscaloosa, AL | 35401 | 800-228-2656 |
| Southwest District | 7910 S. Central Exp. | Dallas, TX | 75216 | 800-443-1834 |
| Western District | 5300 East 43rd Ave. | Denver, CO | 80216 | 800-530-8868 |

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.