

# TAMKO® PERFORATED STARTER

## SHINGLE STARTER

MANUFACTURED IN FREDERICK, MD

PRODUCT DATA

### DESCRIPTION

Information included in this product data sheet was current at time of printing.

To obtain a copy of the most current version of this product data sheet, visit us online at [tamko.com](http://tamko.com) or call us at 800-641-4691.

**TAMKO® PERFORATED STARTER** course shingles are perforated to allow them to be separated into two starter strips. Made of fiberglass mat coated with asphalt and surfaced with ceramic granules.

- Perforated shingles to reduce labor time to field cut shingles.
- Helps reduces waste.
- Sealant strip to seal first course of shingles.
- Fills in the spaces under the shingle joints.
- Allows the first course of shingles to seal.

**USES:** For application to the eave or rake edge prior to shingle application. Allows for proper alignment of shingle courses. The starter strip fills in the spaces under the shingles joints and allows the first course of shingles to seal.


**NOTICE: THIS PRODUCT IS SOLD "AS IS" AND WITHOUT WARRANTY OF ANY KIND. ALL WARRANTIES, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED.**

### PRODUCT DATA

Shingle sizes†	Before separation	13 1/4" × 39 3/8"
	After separation	6 5/8" × 39 3/8"
One bundle contains	16 perforated shingles to be separated into 32 starter strip shingles	
Coverage per bundle††	105 linear ft per bundle	

†Subject to manufacturing variation

††When applied according to instruction

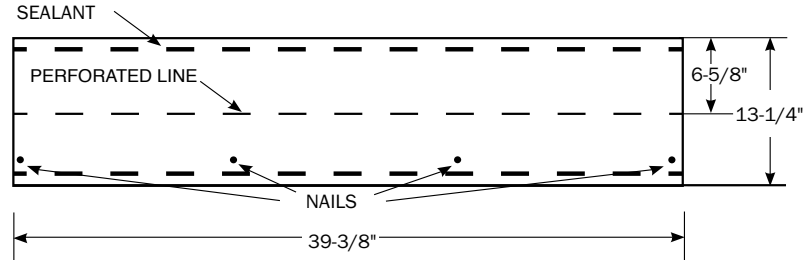

**WARNING:** Use of polyurethane foam insulation applied directly to the underside of a roof deck may cause premature degradation or failure of this asphalt roofing product. We are investigating compatibility of polyurethane foams with our asphalt building products. Chemical incompatibility, off-gassing after application and excess heat during and after application of polyurethane foams may affect the performance of asphalt and modified asphalt building products and metal fasteners used with those products.



**IMPORTANT SAFETY INFORMATION:** Do not install until all appropriate safety precautions have been read and understood. [The TAMKO Safety Data Sheet \(SDS\) is available at tamko.com/sds](http://tamko.com/sds). Always use appropriate fall protection equipment and wear appropriate personal protective equipment (PPE) when working with this product. Moisture, frost, debris or other material will decrease the traction and can cause slippery conditions when walking on the product. **Applicator safety is of utmost importance.**

**WARNING:** This product contains crystalline silica and formaldehyde. Crystalline silica and formaldehyde have been classified as "known human carcinogens" by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains oxidized asphalt. Occupational exposure to oxidized asphalt and its emissions during roofing have been classified by IARC as a "probable human carcinogen". Oxidized asphalt also contains Polycyclic Aromatic Hydrocarbons some of which have been classified by IARC as "known" or "probable human carcinogen". The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing and contact with skin.

**TAMKO**  
BUILDING PRODUCTS

P.O. Box 1404  
Joplin, MO 64802-1404  
800-641-4691  
[tamko.com](http://tamko.com)