

# TAM-PRO® 808 COLD APPLICATION CEMENT

PRODUCT DATA

## DESCRIPTION

A semi-mastic brushing grade material formulated for the professional roofing contractor. Consists of pliable asphalt, quick drying petroleum solvents and tough fibers. Formulated specifically as an adhesive between plies of 19 inch selvedge, smooth or mineral surfaced roll roofing and laps for cold applied built-up roofing applications. Also know as blind-nailing or SIS cement. Acid and alkali resistant.

**100% ASBESTOS FREE!**

## USES

This elastic waterproofing adhesive is specifically blended to set slowly, allowing the roofing membrane to expand, contract and flatten naturally- resisting buckles and wrinkles.


## APPLICATION

Apply with a brush at the following application rates: Cold Method - 1 gallon per 50 sq. ft.  
Lap Cement - 1 gallon covers 396 linear ft.

## APPLICABLE STANDARDS

ASTM D 3019 Type III Standard Specification for Lap Cement Used with Asphalt Roll Roofing  
Miami-Dade County Product Control Approved  
NOA 08-0423.16 Expiration Date 07/24/13

**CAUTION:** This product contains crystalline silica. Crystalline silica has been classified as a "known" human carcinogen by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains cutback asphalt. IARC has classified "extracts of steam and air-refined bitumens" (cutback asphalt) as "possibly carcinogenic to humans." The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing fumes and contact with skin.

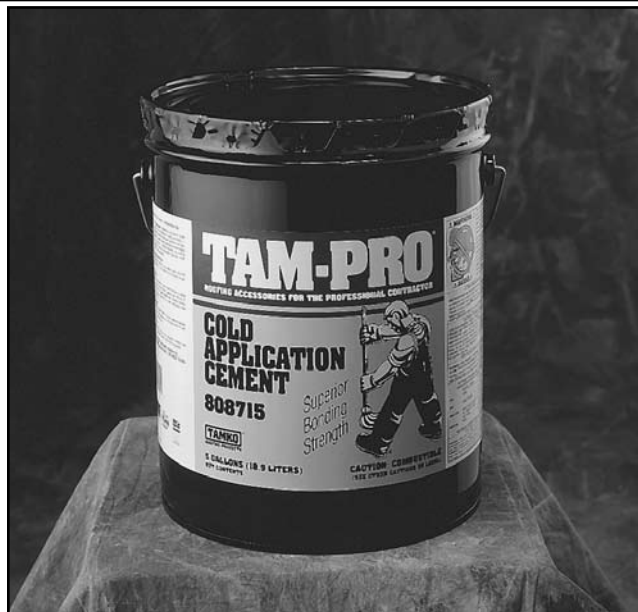

## PRODUCT NUMBER

30001255 – 5 GAL – Green Cove Springs FL  
30001634 – 5 GAL – Columbus KS

## TYPICAL PHYSICAL PROPERTIES\*

	MIN	MAX	METHOD
Total solids (non-volatile), %	55	65	D 4479
Volatiles, %	35	45	---
Minerals and other stabilizers, %	10	20	---
Flash Point, F	100	--	D 93
Ply strengths lbs./in.	17	--	D 3019
Viscosity, Stormer/450 grams @ 77 F, seconds	120	170	
VOC, grams/litre	--	300	

\*All values stated as nominal

For Technical Services call 800-641-4691.

Central District	220 West 4th Street, Joplin, Missouri 64801	800-641-4691
Northeast District	4500 Tamko Drive, Frederick, Maryland 21701	800-368-2055
Southeast District	2300 35th Street, Tuscaloosa, Alabama 35401	800-228-2656
Southwest District	7910 South Central Expressway, Dallas, Texas 75216	800-443-1834
Western District	5300 East 43rd Avenue, Denver, Colorado 80216	800-530-8868

TAMKO® and TAM-PRO® are registered trademarks of TAMKO Building Products, Inc.

©2012 TAMKO Building Products, Inc.

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.

tamko.com

