


TAMKO® FIBERED ROOF & FOUNDATION COATING PRODUCT DATA

A semi-mastic material consisting of select asphalt, mineral stabilizers, petroleum solvents and special fibers. Primarily used on all types of low sloped roof surfaces with the exception of coal tar based roofing. Acid and alkali resistant.

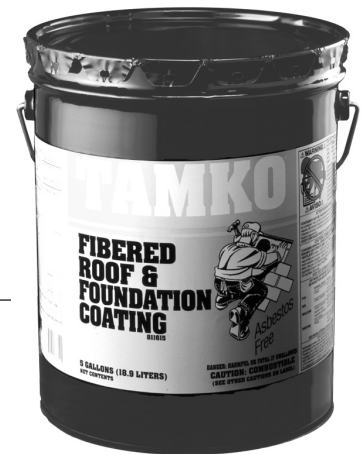

PRODUCT NUMBER
30001259 - 5 GAL - Green Cove Springs FL
30001636 - 5 GAL - Columbus KS

USES

100% ASBESTOS FREE - GUARANTEED!

Provides needed additional weathering protection for membrane surfaces. Used on existing roofs to increase life expectancy and new roofs after suitable weathering.

Foundations - Primarily used for below grade exterior concrete and masonry wall damp-proofing to prevent corrosion and seal out moisture.

APPLICATION

Apply with a roofer's brush or spray equipment. Can be applied at temperatures as low as 50°F when kept at room temperature prior to use.

Foundations - A two-coat application is recommended allowing first coat to dry 24 hours. Apply material from footing to grade level, working and coating into all crevices and pores. Uniformity is important. Do not leave thin or bare spots.

Composition Roofing
Foundation Coating

1 to 4 gallons per 100 sq. ft.
2 gallons covers 100 sq. ft. per coat
Two coat application

PRODUCT DATA*

TYPICAL PHYSICAL PROPERTIES*

	MIN	MAX
Total solids (non-volatile),%	55	65
Volatiles, %	35	45
Mineral and other stabilizers, %	10	20
Flash point, °F	100	- -
VOC, grams/litre	- -	300
Viscosity, Stormer/100 rev. @77°F, seconds	100	200

SPECIFICATION COMPLIANCE:

ASTM D 4479 Standard Specification for Asphalt Roof Coating

*All values stated as nominal

Visit our Web Site at tamko.com

For Technical Services call 1-800-641-4691



TAMKO
BUILDING PRODUCTS

TAMKO Logo, Roofer Logo and TAMKO® are registered trademarks of TAMKO® Building Products, Inc.

CAUTION: This product contains crystalline silica. Crystalline silica has been classified as a "known" human carcinogen by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains cutback asphalt. IARC has classified "extracts of steam and air-refined bitumens" (cutback asphalt) as "possibly carcinogenic to humans." The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing fumes and contact with skin.

Central District	220 West 4th St.	Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr.	Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St.	Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp.	Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave.	Denver, CO	80216	800-530-8868

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.