

TAMKO® Slate Surfaced Roll Roofing

PRODUCT DATA

Manufactured in Phillipsburg, KS.

TAMKO® SLATE SURFACED ROLL ROOFING is constructed from TAMKO's organic mat, impregnated with hot asphaltic saturant, then coated on both sides with weathering grade asphalt and surfaced with mineral granules.



USES

For application to roof decks with inclines of not less than 2 inches per foot.


PRODUCT DATA*

Roll Dimensions	36' X 36"
Coverage per roll	1 Square

*All values stated as nominal

COLORS

- Sand Pebble
- Rustic Black
- Empire Green Blend
- Rustic Brown
- Weathered Wood
- White
- Rustic Cedar

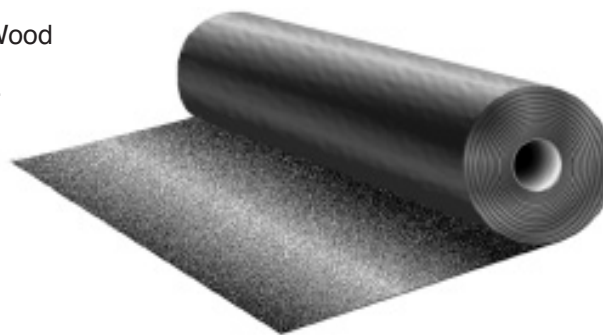

Visit our Web Site at tamko.com



TAMKO Logo, Roofer Logo and TAMKO® are registered trademarks of TAMKO® Building Products, Inc.

CAUTION: This product contains crystalline silica and wood dust. Crystalline silica and wood dust have been classified as "known" human carcinogens by the International Agency for Research on Cancer and the National Toxicology Program. This product contains asphalt. The National Institute for Occupational Safety and Health has concluded that the fumes of heated roofing asphalt are a potential occupational carcinogen. The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing and contact with skin.

Central District	220 West 4th St.	Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr.	Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St.	Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp.	Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave.	Denver, CO	80216	800-530-8868

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.